

ULTRA<sup>®</sup>  
ARIOSTEA<sup>®</sup>HIGHTECH

GREAT  
SURFACES

ULTRAMARMI  
270x100/100x100

ULTRA  
MARM

270x100

100x100

NEW SIZES







THE  
FINEST  
MARBLE  
FOR YOUR  
PRECIOUS  
LIVING  
SPACES


**8** COLORS  
**3** FINISHES  
**6 mm** THICKNESS



270x100 cm

CALACATTA  
MACCHIA  
VECCHIA

FINISHES  
LUCIDATO SHINY  
SOFT

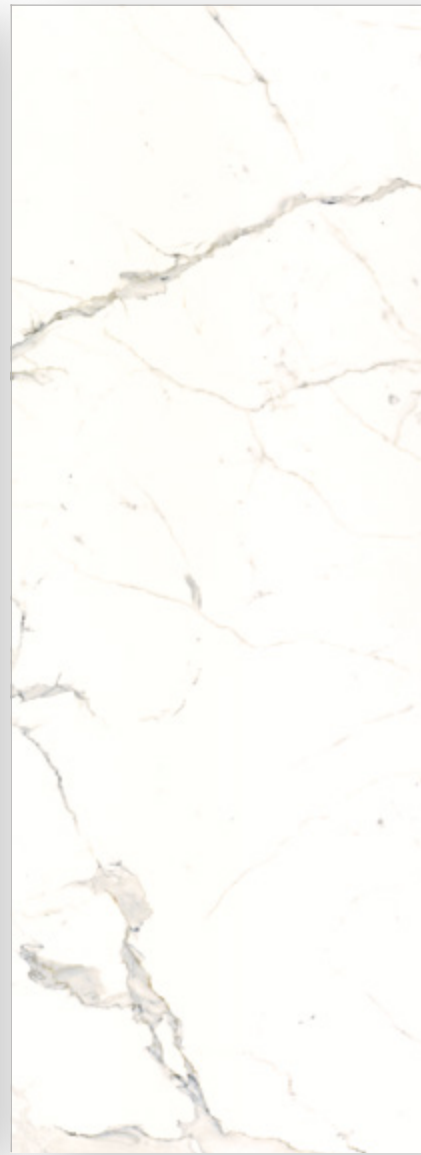

270x100 cm


B I A N C O  
C A L A C A T T A

FINISHES  
LUCIDATO SHINY  
SOFT

270x100 cm

B I A N C O  
C O V E L A N O

FINISHES  
LUCIDATO SHINY  
SOFT

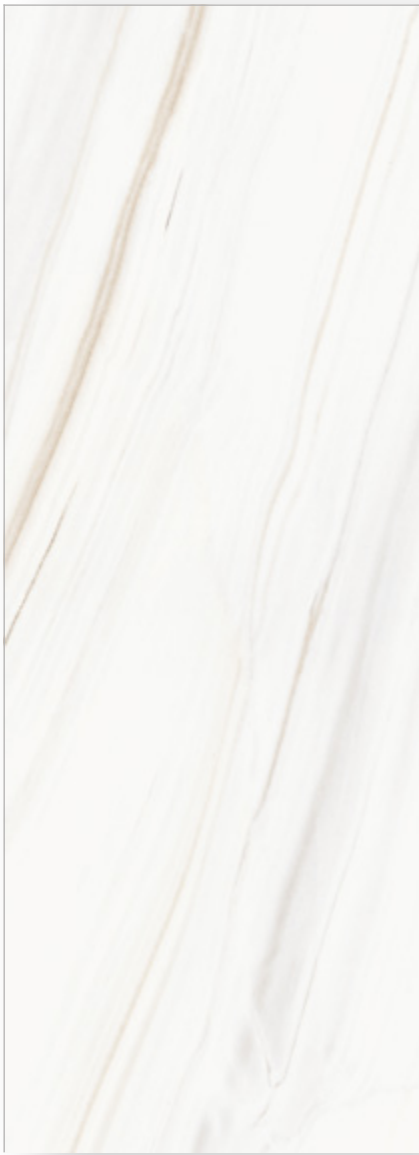

270x100 cm

S T A T U A R I O  
A L T I S S I M O

FINISHES  
LUCIDATO SHINY  
SOFT

270x100 cm

A R A B E S C A T O  
S T A T U A R I O

FINISHES  
LUCIDATO SHINY  
SOFT



270x100 cm

F I O R D I  
B O S C O

FINISHES  
LUCIDATO SHINY  
SOFT

270x100 cm

G R E Y  
M A R B L E

FINISHES  
LUCIDATO SHINY  
SOFT



270x100 cm

N E R O  
M A R Q U I N I A


FINISHES  
LUCIDATO SHINY  
LEVIGATO SILK

100x100 cm



100x100 cm

100x100 cm

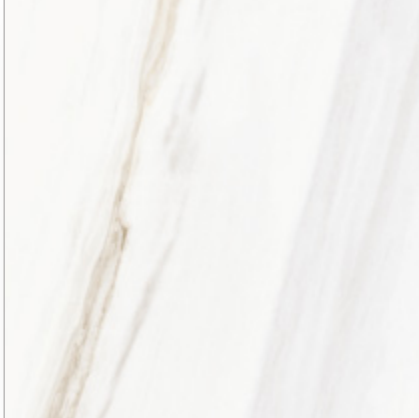

100x100 cm

100x100 cm



100x100 cm

100x100 cm















100x100 cm



CARATTERISTICHE TECNICHE / TECHNICAL FEATURES / TECHNISCHE EIGENSCHAFTEN / CARACTÉRISTIQUES TECHNIQUES

Classificazione Gruppo Bla secondo le norme EN 14411 All. G e ISO 13006 All. G / Classification Bla Group in accordance with EN 14411 annex G and ISO 13006 annex G. / Klassifizierung der Bla Gruppe gemäß der EN 14411 Anl. G und ISO 13006 Anl. G Normen / Classification groupe Bla selon les normes EN 14411 All.G et ISO 13006 All.G

PROPRIETÀ CHIMICO - FISICHE / CHEMICAL / PHYSICAL PROPERTIES / CHEMISCH PHYSISCHE EIGENSCHAFTEN / PROPRIÉTÉS CHIMICO - PHYSIQUES		NORMA / REGULATION / NORMEN / NORME	VALORE PRESCRITTO / REQUIRED VALUE / VORGESCHRIEBENER WERT / VALEUR PRESCRITE	VALORI MEDI ULTRA / ULTRA AVERAGE VALUES / ULTRA DURCHSCHNITTSWERTE / VALEURS MOYENNES ULTRA
 <b>DIMENSIONI</b> / SIZES / ABMESSUNGEN / DIMENSIONS		ISO 10545-2	<b>± 0,6% max</b> Lunghezza e larghezza / Lenght and width / Länge und breite / Longueur et largeur	<b>± 0,1%</b> Lunghezza e larghezza / Lenght and width / Länge und breite / Longueur et largeur
			<b>± 5% max</b> Spessore / Thickness / Stärke / Epaisseur	<b>± 5%</b> Spessore / Thickness / Stärke / Epaisseur
			<b>± 0,5% max</b> Rettilineità spigoli / Linearity / Kantengeradheit / Rectitude des arêtes	<b>± 0,1%</b> Rettilineità spigoli / Linearity / Kantengeradheit / Rectitude des arêtes
			<b>± 0,5% max</b> Ortogonalità / Wedging / Rechtwinkligkeit / Orthogonalité	<b>± 0,1%</b> Ortogonalità / Wedging / Rechtwinkligkeit / Orthogonalité
			<b>± 0,5% max</b> Planarità / Warpage / Ebenflächigkeit / Planéité	<b>± 0,2%</b> Planarità / Warpage / Ebenflächigkeit / Planéité
 <b>ASSORBIMENTO D'ACQUA</b> / WATER ABSORPTION / WASSERAUFNAHME / ABSORPTION D'EAU		ISO 10545-3	<b>≤ 0,5 %</b>	Superfici: / Surfaces: / Oberflächen: / Surfaces: <b>0,03%</b> Soft - Structured <b>0,06%</b> <b>0,05%</b> Lucidato Shiny - Prelucidato- Levigato Silk <b>0,08%</b>
 <b>MODULO DI ROTTURA (R)</b> / MODULS OF RUPTURE (R) / BRUCHMODUL (R) / MODULE DE RUPTURE (R) <b>SFORZO DI ROTTURA (S)</b> / BREAKING STRENGHT (S) / BRUCHKRAFT (S) / FORCE DE RUPTURE (S)		ISO 10545-4	<b>≥ 35 N/mm²</b>	<b>49 N/mm²</b>
			<b>&lt; 7,5mm ≤ 700 N</b> Spessore/ Thickness/ Stärke/ Epaisseur	<b>Conforme / Conforms / Konform / Conforme *</b>
 <b>RESISTENZA ALL'ABRASIONE PROFONDA</b> / DEEP ABRASION RESISTANCE / TIEFVERSCHLEISSBESTÄNDIGKEIT / RESISTANCE A L'ABRASION PROFONDE		ISO 10545-6	<b>max 175 mm<sup>3</sup></b>	<b>140 mm<sup>3</sup></b>
 <b>DILATAZIONE TERMICA LINEARE</b> COEFFICIENT OF LINEAR THERMAL EXPANSION / LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT / DILATATION THERMIQUE LINEAIRE		ISO 10545-8	Metodo di prova disponibile / Testing method available / Verfügbares prüfverfahren / Méthode d'essai disponible	<b>6,5x10<sup>-6</sup> °C<sup>-1</sup></b>
 <b>RESISTENZA SBALZI TERMICI</b> RESISTANCE TO THERMAL SHOCKS / TEMPERATURWECHSELBESTÄNDIGKEIT / RESISTANCE AUX ECARTS DE TEMPERATURE		ISO 10545-9	Metodo di prova disponibile / Testing method available / Verfügbares prüfverfahren / Méthode d'essai disponible	<b>Resistente / Resistant / Beständig / Resistant</b>
 <b>RESISTENZA AL CELO</b> / FROST RESISTANCE / FROSTBESTÄNDIGKEIT / RESISTANCE AU GEL		ISO 10545-12	Nessun campione deve presentare rotture o alterazioni apprezzabili della superficie / No sample must show alterations to surface / Die Muster sollen weder Bruch noch Schäden an der Oberfläche aufweisen / Aucun échantillon ne doit présenter de ruptures ou d'altérations considérables de la surface	<b>Conforme / Conforms / Konform / Conforme</b>
 <b>RESISTENZA AI PRODOTTI CHIMICI</b> RESISTANCE TO CHEMICAL PRODUCTS / CHEMIKALIENBESTÄNDIGKEIT / RESISTANCE AUX PRODUITS CHIMIQUES		ISO 10545-13	Resistenza prodotti chimici uso domestico e additivi per piscina (min. classe B) / Resistance to household chemicals and pool additives (min. class B) / Haushaltchemikalien und Pooladditive Beständigkeit (min. Klasse B) / Résistance aux produits chimiques, usage domestique et additifs pour piscine (classe B minimum)	Superfici: / Surfaces: / Oberflächen: / Surfaces: - Soft - Structured <b>A</b> - Lucidato Shiny - Prelucidato - Levigato Silk <b>A</b>
			Resistenza acidi e alcalini a bassa concentrazione / Resistance to acids and alkalis at low concentration / Alkali- und Säurebeständigkeit in niedriger Konzentration / Résistance aux acides et alcalins à concentration faible	- Soft - Structured <b>LA</b> - Lucidato Shiny - Prelucidato - Levigato Silk <b>LB</b>
			Resistenza acidi e alcalini a alta concentrazione / Resistance to highly concentrated acid and alkaline products / Hochkonzentrierte Säure- und Alkalibeständigkeit / Résistance aux acides et alcalins à concentration élevée	- Soft - Structured <b>HA</b> - Lucidato Shiny - Prelucidato - Levigato Silk <b>HB</b>
 <b>RESISTENZA ALLE MACCHIE</b> STAIN RESISTANCE / FLECKENBESTÄNDIGKEIT / RESISTANCE AUX TACHES		ISO 10545-14	Metodo di prova disponibile / Testing method available / Verfügbares prüfverfahren / Méthode d'essai disponible	Superfici: / Surfaces: / Oberflächen: / Surfaces: Soft - Structured <b>Classe 5</b> Lucidato Shiny - Prelucidato- Levigato Silk <b>Disponibile a richiesta / Available on request / Auf Anfrage erhältlich / Disponible sur demande</b>
 <b>RESISTENZA COLORI ALLA LUCE</b> RESISTANCE TO LIGHT / LICHTBESTÄNDIGKEIT DER FARBEN / RESISTANCE DES COULEURS A LA LUMIERE		DIN 51094	Nessun campione deve presentare apprezzabili variazioni di colore / No sample must show noticeable colour change / Kein Exemplar soll sichtbare Farbveränderungen aufweisen / Aucun échantillon ne doit présenter de variations importantes des couleurs	Campioni inalterati in brillantezza e colore / No change in brightness or colour / Glanz und Farbe der Muster unverändert / Echantillons inchangés en brillance et couleur
 <b>COEFFICIENTE DI ATTRITO</b> / FRICTION COEFFICIENT / REIBUNGSKOEFFIZIENT / COEFFICIENT DE FRICTION		BCR DM 236/89  DIN 51130	Metodo di prova disponibile / Testing method available / Verfügbares prüfverfahren / Méthode d'essai disponible	Disponibili a richiesta le classificazioni / Classifications available on request / Klassifizierungen sind auf Anfrage erhältlich / Les classifications sont disponibles sur demande **
 <b>REAZIONE AL FUOCO</b> / REACTION TO FIRE / REAKTION AUF FEUER / RÉACTION AU FEU		96/603/CE	Prova assente / Not applicable / Nicht anwendbar / Pas d'essai	<b>A1 - A1<sub>FL</sub></b>

\* Test effettuato su Basaltina Moka 100x100cm Soft/ Test performed on Soft Basaltina Moka 100x100cm Soft / Test durchgeführt Auf Basaltina Moka 100x100cm Soft / Essai effectué sur Basaltina Moka 100x100cm Soft

\*\* Vedi tabella Safe System / See Safe System table / Siehe Tabelle Safe System / Voir tableau Safe System

**n.b.:** I valori di resistenza allo scivolamento, coefficiente di attrito statico o dinamico, riportati sul catalogo e nella tabella Safe System sono da ritenersi puramente indicativi e non vincolanti. Ogni eventuale specifica necessità dovrà essere da noi confermata al momento dell'ordine e comunque sempre prima della posa.

**n.b.:** Slip resistance values, coefficient of static or dynamic friction, in the catalog and in the Safe System Table are purely indicative and not binding. Any specific requirements must be confirmed by us at the time of ordering and in any case before installation.

Edition 01 - January 2020 - CAT02510

CODICI E FORMATI /  
CODES AND SIZES

SPESSORE: THICKNESS:		FINITURA / FINISHES	270x100 106,30"x40"	100x100 40"x40"
	6 mm			
				
ARABESCATO STATUARIO	LS	UM6L270479	UM6L100479	
	SO	UM6S270479	UM6S100479	
	SK	-	-	
BIANCO CALACATTA	LS	UM6L270536	UM6L100536	
	SO	UM6S270536	UM6S100536	
	SK	-	-	
BIANCO COVELANO	LS	UM6L270480	UM6L100480	
	SO	UM6S270480	UM6S100480	
	SK	-	-	
CALACATTA MACCHIA VECCHIA	LS	UM6L270575	UM6L100575	
	SO	UM6S270575	UM6S100575	
	SK	-	-	
FIOR DI BOSCO	LS	UM6L270574	UM6L100574	
	SO	UM6S270574	UM6S100574	
	SK	-	-	
GREY MARBLE	LS	UM6L270524	UM6L100524	
	SO	UM6S270524	UM6S100524	
	SK	-	-	
NERO MARQUINIA	LS	UM6L270547	UM6L100547	
	SO	-	-	
	SK	UM6SK270547	UM6SK100547	
STATUARIO ALTISSIMO	LS	UM6L270441	UM6L100441	
	SO	UM6S270441	UM6S100441	
	SK	-	-	

**SO:** Soft    **SK:** Levigato Silk    **LS:** Lucidato Shiny  
Rettificato monocalibro / Rectified single-calibre

GRADO DI VARIAZIONE CROMATICA /  
DEGREE OF COLOUR CHANGE

ARABESCATO STATUARIO    **V3**  
BIANCO CALACATTA    **V3**  
BIANCO COVELANO    **V3**  
CALACATTA MACCHIA VECCHIA    **V3**  
FIOR DI BOSCO    **V2**  
GREY MARBLE    **V3**  
NERO MARQUINIA    **V2**  
STATUARIO ALTISSIMO    **V3**



**V2 MODERATE**  
PRODOTTO CON LEGGERA VARIAZIONE CROMATICA /  
PRODUCT WITH LIGHT CHROMATIC VARIATION



**V3 HIGH**  
PRODOTTO CON MARCATÀ VARIAZIONE CROMATICA /  
PRODUCT WITH HIGH SHADE CHROMATIC VARIATION

Informazioni tecniche aggiuntive

Ultra è un prodotto derivante dalla combinazione della terra con il fuoco. Ultra Ariostea prevede un certo numero di facce differenti, a parità di prodotto, per creare una gradevole variabilità estetica nella posa. In fase di approntamento dell'ordine la selezione delle facce è random, quindi la venatura continua tra i pezzi ordinati e la successione delle facce non sono garantite. La eventuale continuità di venatura tra un pezzo e l'altro è soggetta alla tolleranza tipica dei prodotti naturali.

Additional technical information

Ultra is the result of the combination of earth and fire. Ultra Ariostea provides a number of different faces for the same item, to create a pleasant aesthetic variability when fixed. The order preparation process assures a random face selection. For this reason neither the vein continuity through the ordered slabs nor the sequence of the various faces can be guaranteed. The continuous veining between slabs is subject to the typical variation tolerances of natural products.



**ARIOSTEA**

via Cimabue 20  
42014 Castellarano  
Reggio Emilia - Italy  
Tel. +39 0536 816811  
Fax +39 0536 816838 (Italy)  
Fax +39 0536 816858 (Export)

ARIOSTEA.IT  
ULTRA.ARIOSTEA.IT

A BRAND OF



IRIS  
CERAMICA  
GROUP